



VKC-1392/12-24

Article-No.: 202390

1/3" Camera, Day&Night,
D-WDR, 2D-DNR, BLC, HLC,
700 TVL, 12VDC/24VAC

Mainfeatures

1/3" Super HAD II CCD Effio E
Digital noise reduction (DNR)
Switchable automatic gain control (AGC)
Adjustable backlight compensation
Privacy masking/mirror function/motion detection

Colour/b&w selection
Digital Wide Dynamic range
High speed shutter control (ESC/MES)
Automatic white balance (AWB)
Supply voltage: 12VDC or 24VAC





Specifications

System	True Day&Night
Video standard	CCIR/PAL
Sensor size	1/3"
Imager	CCD
Imager	Sony Effio E (960H) Enhanced
Active picture elements	976(H) x 582(V) pixels
Horizontal resolution	700 TVL
Synchronization	internal
Signal-to-noise ratio	-50 db
Sensitivity	0,15 Lux
Sensitivity	(colour) 0.01Lux (B&W) at F1.2, 50 IRE
Automatic gain control (AGC)	ON/OFF switchable
Exposure modes	automatic, iris priority, shutter priority
Automatic electronic shutter (ESC)	1/50 ~ 1/10,000sec.
Manual electronic shutter (MES)	1/50 ~ 1/10,000sec.
Low speed shutter	no
Digital Noise Reduction (DNR)	yes


Specifications (continued)

Digital Noise Reduction (DNR)	2D-DNR
Backlight compensation	BLC, HLC
Wide Dynamic Range (WDR)	D-WDR
White balance	ATW, one push, Anti CR, manual
IR cut filter	switchable
Day/Night switching	auto, On, Off
Privacy zones masking	4 areas, masking, X/Y start/end
OSD function control	AGC, AWB, motion detection, BLC/HLC, digital noise reduction (DNR), privacy zones, brightness, language, day&night
Menu languages	German, English, French, Spanish, Portugese, Japanese, Russian
Text display	52 character labels
Brightness	selectable
Sharpness correction	selectable
Activity detection	yes
Motion detector	4 zones, ON/OFF switchable
Mirror function	H-flip
Digital zoom	no
Analysis functions	motion detection
e-PTZ support	no
Lens mount	CS/C mount
Iris control	DC, manual
Auto exposure	Automatic/Manual Shutter/AGC
Illumination	no
Video outputs	composite (CVBS)
Video outputs	1Vp-p, (C)VBS, 75ohms, BNC
External connections	video (BNC), voltage input
Serial interfaces	no
Alarm inputs	no
Alarm outputs	no
Supply voltage	12VDC, 24VAC
Power consumption	3.6W
Colour	Pantone 877C, Side wings: Pantone Cool Gray 11C
Protection rating	-
Temperature range (operation)	-10°C ~ +50°C
Dimensions (HxWxD)	56x67,5x124
Weight	270g
Parts supplied	manual, C/CS adapter, 4-pin lens plug
Certificates	CE

Optional Accessories

Image	Article ID / type	Description
	WD-23	Wall Mount Bracket with Ball Joint, 1/4" Camera Fixing Screw, Pantone 877
	VTL-WWD	Weatherproof Housing (300mm) RAL9002, Wallbracket, Thermostat, Heater 12-24V
	F03Z2.6DC-NFSHR	F1.0/3-8mm DC Lens, Varifocal, No Focus Shift, High Resolution, 1/3" CS Mount
	VT-PS12DC-11	Plug-in Power Supply Unit, 100-240VAC/12VDC (1.0A), Regulated, with DC Plug

Technical Drawing

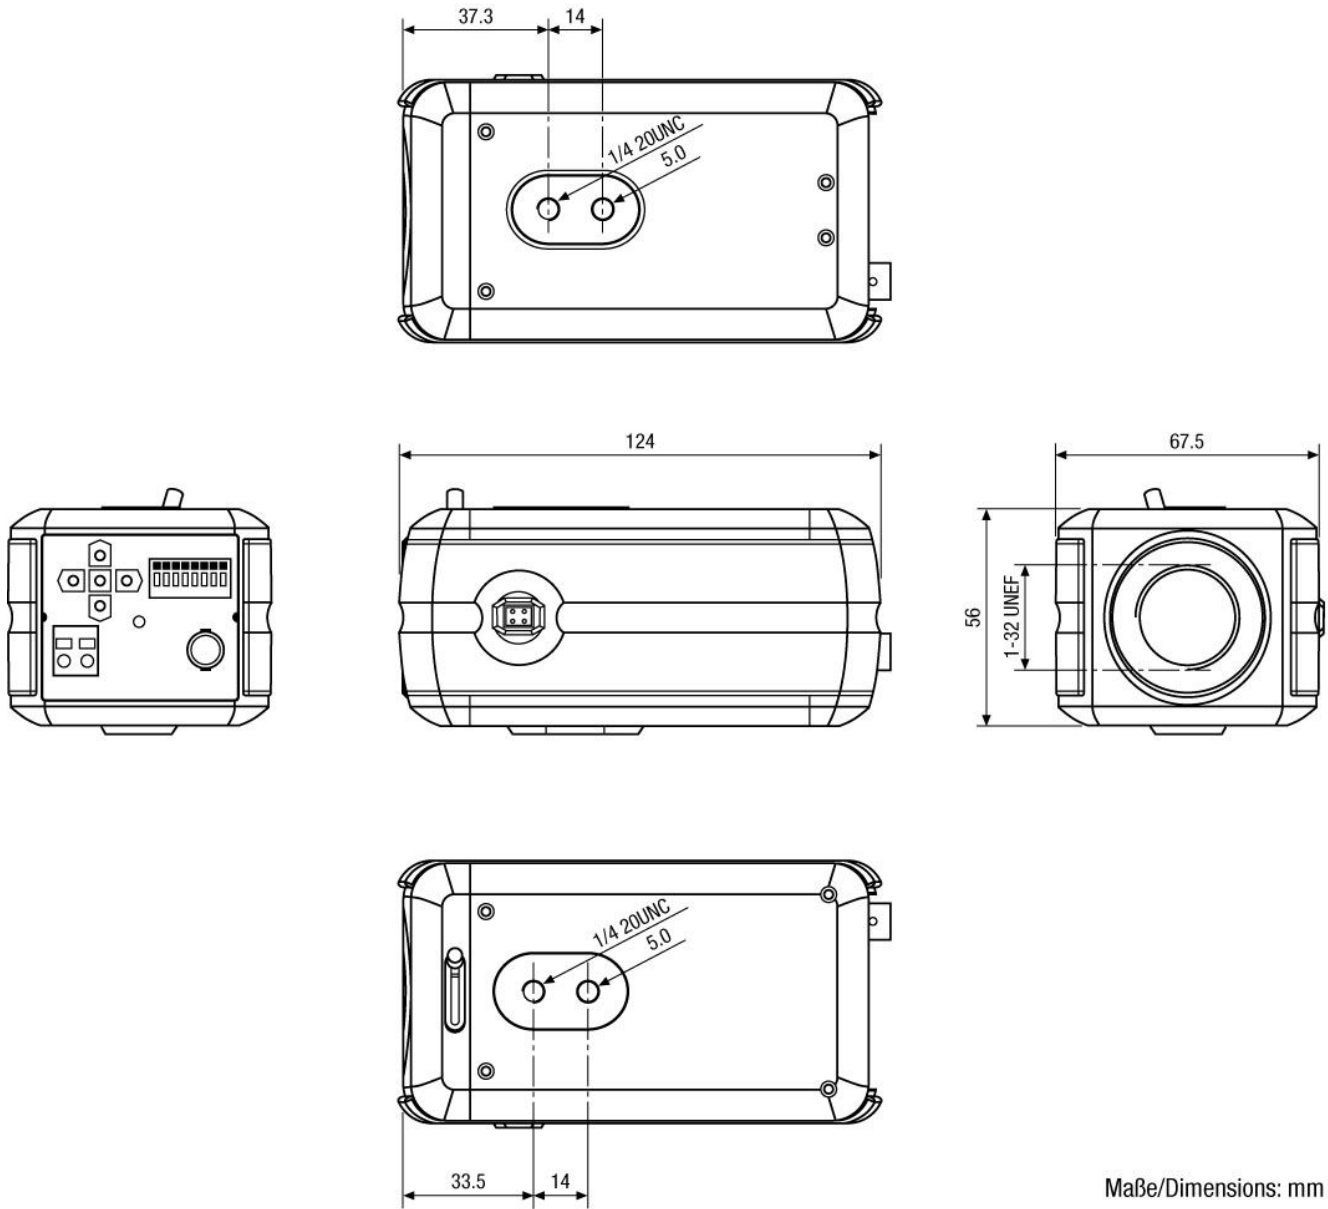

Maße/Dimensions: mm



Your partner for eneo products:

